

CONTEG DATASHEET

WALL-MOUNT & SOHO RACKS

Wall-Mount OPTIMAL RON

CONTEG, spol. s r.o.

Czech Republic Headquarters:

Na Vítězné pláni 1719/4

140 00 Prague 4

Tel.: +420 261 219 182

Fax: +420 261 219 192

Production plant in the Czech Republic:

K Silu 2179

393 01 Pelhřimov

Tel.: +420 565 300 300

Fax: +420 565 533 955

Local Branches/Offices

Austria:	+43 170 659 0115
Benelux:	+32 477 957 126
Eastern Europe / Nordics:	+49 172 8484 346
France / Italy / Maghreb:	+33 686 074 386
Germany / Switzerland:	+420 724 723 184
India:	+91 991 6950 773
Middle East:	+971 4445 2838
Russia / CIS:	+7 495 967 3840
Saudi Arabia:	+966 594 30 13 08
Ukraine:	+380 674 478 240

conteg@conteg.com

www.conteg.com

Wall-Mount OPTIMAL RON


Wall-Mount OPTIMAL RON racks are designed for wall-mount installation. Access to the installed equipment is through the front. The rack features a design with excellent rigidity. These 19" wall-mount telecommunication and data racks are designed for the installation of patch panels, active components, etc. Should you need rear access to the installed equipment please refer to the Wall-Mount OPTIMAL Split ROD racks.

COLOR SAMPLER:

RAL 7035



RON-15-60/40

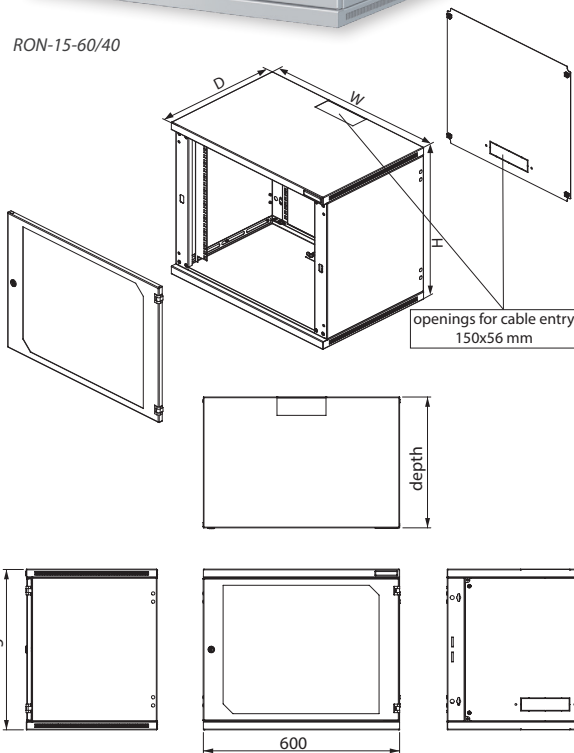

DESCRIPTION:

Sizes

- Height: 4, 6, 9, 12, 15, 18U
- Width: 600 mm
- Depth: 400 and 600 mm

Construction

- 1.25 mm sheet steel

Load rating

- Standard 40 kg balanced load

IP rating

- Standard IP20

Colors

- Standard RAL 7035
- Optionally other colors

Front door

- Tinted security glass (EN 12150-1) or sheet steel door
- Reversible door – easy to re-hang to open right or left (at installation site)
- Door opening angle 180°

Rear panel

- Removable with module for cable entry
- When installed without the rear panel additional holes are exposed for installation of 19" components
- Mounting holes for wall installation on the back

Cable entries

- Top and bottom openings for cable entry, size 150x56 mm
- Covered with sliding blank panel with butterfly nuts (DP-DB-200x68)
- Variable openings in relation to number of cables entering the rack
- Cable entries on rear edge of enclosure for straight cable path alongside the wall

Others

- Drilling template
- Possibility to add extra pair of extrusions (DP-LV-N-xx)

STANDARD CONFIGURATION:

- 1 pair of sliding 19" vertical extrusions
- Tinted security glass (EN 12150-1) with lock
- GND/earthing kit
- 16 mounting kits

Code	H in U	Dimensions in mm				Dimensions incl. packing in mm			Gross weight in kg
		H	W	D	Useful depth	H	W	D	
RON-04-60/40	4	300	600	400	370	325	625	435	15
RON-06-60/40	6	388	600	400	370	413	625	435	17
RON-09-60/40	9	521	600	400	370	546	625	435	20
RON-12-60/40	12	655	600	400	370	680	625	435	24
RON-15-60/40	15	788	600	400	370	813	625	435	27
RON-18-60/40	18	921	600	400	370	946	625	435	30
RON-06-60/60	6	388	600	600	570	413	625	635	21
RON-09-60/60	9	521	600	600	570	546	625	635	24
RON-12-60/60	12	655	600	600	570	680	625	635	30
RON-15-60/60	15	788	600	600	570	813	625	635	31
RON-18-60/60	18	921	600	600	570	946	625	635	38