



# WALL-MOUNT & SOHO RACKS

## PREMIUM RUN

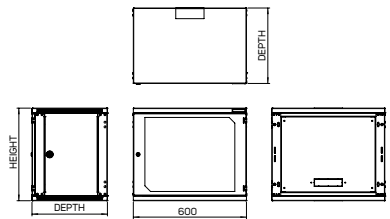

RUN-09-60/40

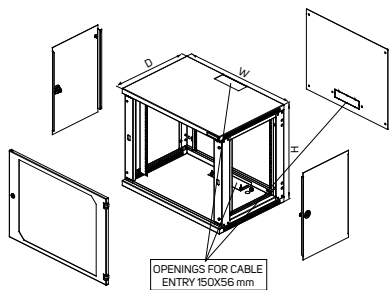

COLOR SAMPLER:  RAL 7035

### DESCRIPTION:

#### Sizes

- Height: 6, 9, 12, 15, 18U
- Width: 600 mm
- Depth: 400, 500 or 600 mm

#### Construction

- 1.25 mm sheet steel

#### Load rating

- Standard 40 kg (depth 400 and 500 mm), standard 30 kg (depth 600 mm)

#### IP rating

- Standard IP30

#### Colors

- Standard RAL 7035

➤ **Wall-Mount PREMIUM RUN** racks are designed for wall-mount installation with extended access.

### MAIN ADVANTAGES

- Excellent rigidity
- Unobstructed access to installed equipment from front and sides
- Lockable side panels

#### PREMIUM RUN – LOAD RATING 30 KG

Code	H (in U)	Dimensions (mm)				Dimensions including packing (mm)			Gross weight (kg)
		H	W	D	Useful depth	H	W	D	
RUN-06-60/60	6	358	603	600	580	378	620	630	20
RUN-09-60/60	9	491	603	600	580	510	620	630	26
RUN-12-60/60	12	624	603	600	580	645	620	630	29
RUN-15-60/60	15	758	603	600	580	778	620	630	33
RUN-18-60/60	18	891	603	600	580	910	620	630	39

#### PREMIUM RUN – LOAD RATING 40 KG

Code	H (in U)	Dimensions (mm)				Dimensions including packing (mm)			Gross weight (kg)
		H	W	D	Useful depth	H	W	D	
RUN-06-60/40	6	358	600	400	380	378	620	430	16
RUN-09-60/40	9	491	600	400	380	510	620	430	20
RUN-12-60/40	12	624	600	400	380	645	620	430	23
RUN-15-60/40	15	758	600	400	380	778	620	430	27
RUN-18-60/40	18	891	600	400	380	910	620	430	33
RUN-06-60/50	6	358	600	500	480	378	620	530	18
RUN-09-60/50	9	491	600	500	480	510	620	530	23
RUN-12-60/50	12	624	600	500	480	645	620	530	26
RUN-15-60/50	15	758	600	500	480	778	620	530	30
RUN-18-60/50	18	891	600	500	480	910	620	530	36

#### Front door

- Tinted security-glass (EN 12150-1) or sheet steel door
- Reversible door – easy to re-hang for opening right or left
- Door opening angle 180°

#### Rear panel

- Removable, with module for cable entry
- When installed without rear panel, additional holes exposed for installation of 19" components
- Mounting holes for wall installation on back

#### Cable entries

- Top and bottom openings for cable entry, size 150×56 mm
- Covered by sliding blank panel with butterfly nuts (DP-DB-200×68)

- Variable openings in relation to number of cables entering rack
- Cable entries on rear edge of enclosure for straight cable path alongside wall

#### Other

- Drilling template
- Extra pair of DP-LV-N-xx extrusions optional

### STANDARD CONFIGURATION:

- 1 pair sliding 19" vertical extrusions
- 2 removable side panels with lock
- Tinted security-glass door (EN 12150-1) with lock
- GND/earthing kit
- 16 mounting kits

Note: All dimensions in mm

[www.conteg.com](http://www.conteg.com)



**CONTEG, spol. s r.o.**

**Headquarters:**

Na Vítěznej pláni 1719/4  
140 00 Prague 4  
Czech Republic  
Tel.: +420 261 219 182  
[conteg@conteg.com](mailto:conteg@conteg.com)  
[www.conteg.com](http://www.conteg.com)

**Production plant:**

K Silu 2179  
393 01 Pelhřimov  
Czech Republic  
Tel.: +420 565 300 300

**Local Branches/Offices:**

Austria/Germany/Switzerland:	+420 261 219 182
Benelux:	+31 76 5420 709
Southeastern Europe:	+49 172 8484 346
Finland:	+358 50 414 1257
France/Italy/Maghreb:	+33 1 60 04 55 90
Middle East:	+971 55 508 3241
Russia/CIS:	+7 495 967 3840
Saudi Arabia:	+966 54 000 2341

**CONTEG**